


STANDARD SPECIFICATION	
FREQUENCY RANGE	10.0 MHz ~ 70 MHz
FREQUENCY TOLERANCE AT 25°C	±50ppm
FREQUENCY STABILITY	±50ppm (REF. TO 25°C)
OPERABLE TEMPERATURE RANGE	-10°C ~ + 60°C
DRIVE LEVEL	0.1mW

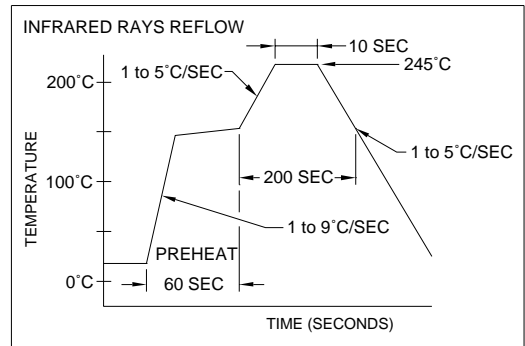

FREQUENCY RANGES	OSCILLATOR MODE	C <sub>L</sub>	ESR MAX.
10.0 MHz ~ 10.999 MHz	FUNDAMENTAL	16pF	45Ω
11.0 MHz ~ 11.999 MHz	FUNDAMENTAL	16pF	40Ω
12.0 MHz ~ 14.999 MHz	FUNDAMENTAL	16pF	35Ω
15.0 MHz ~ 36.0 MHz	FUNDAMENTAL	16pF	30Ω
27.0 MHz ~ 70.0 MHz	3rd	SERIES	100Ω

NOTE:- ABOVE PARAMETERS ARE FOR STANDARD CRYSTAL UNITS,  
OUR SALES OFFICE SHOULD BE CONTACTED FOR ADDITIONAL REQUIREMENTS.