


FM-6B

- SMALL MICROPHONES FOR GENERAL USE.
- ELECTRET TYPE DESIGNED FOR HIGH RESISTANCE TO VIBRATIONS.

SENSITIVITY	
<input type="checkbox"/>	-54dB±2
<input type="checkbox"/>	-56dB±2
<input type="checkbox"/>	-58dB±2
<input type="checkbox"/>	-60dB±2
<input type="checkbox"/>	-62dB±2
<input type="checkbox"/>	-64dB±2
<input type="checkbox"/>	-66dB±2
<input type="checkbox"/>	-68dB±2
<input type="checkbox"/>	-70dB±2
<input type="checkbox"/>	-72dB±2

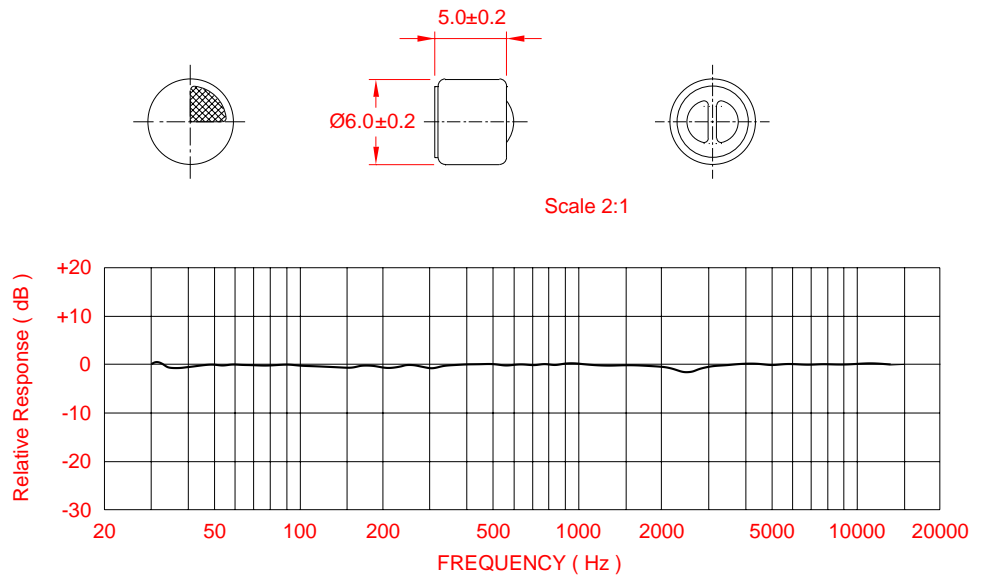

SPECIFICATION	
SENSITIVITY	Refer above (0dB=1Volt / 1µBar, 1kHz)
IMPEDANCE	Low impedance
DIRECTIVITY	Omnidirectional
FREQUENCY	20 Hz to 20,000 Hz
MAXIMUM OPERATING VOLTAGE	10 Volt
STANDARD OPERATING VOLTAGE	2.0 Volt
CURRENT CONSUMPTION	Maximum 0.5mA
SENSITIVITY REDUCTION (M.H.)	Within -3dB at 1.5 Volt
S/N RATIO	More than 58dB

APPLICATIONS
1. Telephone devices.
2. Built-in microphones for tape recorders.
3. Intercoms.
4. Completed microphones for recording, testing and monitoring.
5. Sonic controlled toys and sensors.
6. Others.

