


- SEALED WITH BUILT - IN OSCILLATING CIRCUIT.
- DIP - SOLDERABLE AND WASHABLE.
- SIGNAL TONE.



SPECIFICATION					
MODEL	16MBD-01	16MBD-03	16MBD-05	16MBD-09	16MBD-12
OPERATING VOLTAGE (Volts)	1.25 to 2.5	2.5 to 4.0	4.0 to 7.0	7.0 to 10.0	10.0 to 14.0
RATED VOLTAGE (Volts)	1.5	3.0	5.0	9.0	12
RATED CURRENT (mA)	≤20	≤25	≤30		
SOUND OUTPUT AT 10 cm (dB)	≤80	≤85			
RESONANT FREQUENCY (Hz)	2300 ±150				
RESONANT TIME (msec)	≤50				
OPERATING TEMPERATURE (°C)	-20 to +60				
STORAGE TEMPERATURE (°C)	-30 to +80				
WEIGHT (grams)	2.2				

### CHARACTERISTICS

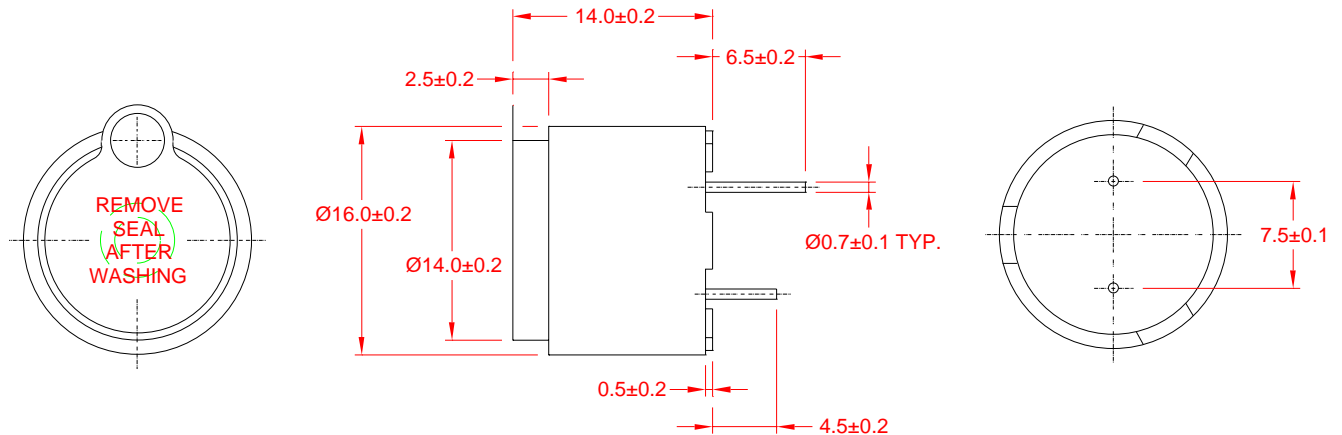