

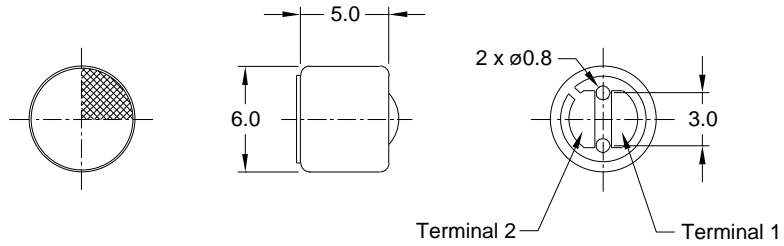


### SM6050N

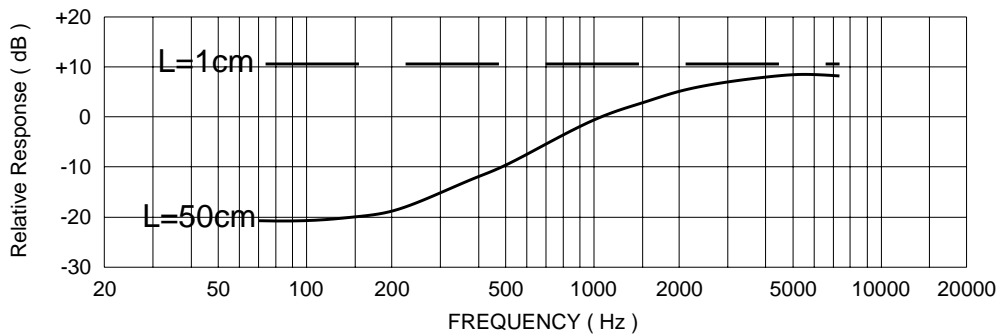

### SM9752N

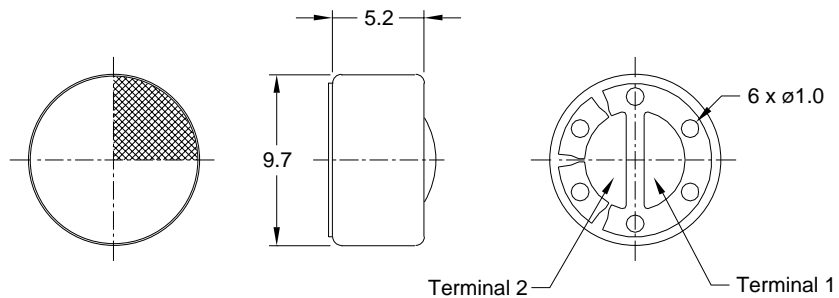

SPECIFICATIONS	
IMPEDANCE	Low impedance
DIRECTIVITY	Noise Cancelling
S/N RATIO	More than 58dB
SENSITIVITY REDUCTION	Within -3dB at 1 Volt
FREQUENCY RANGE	50 Hz to 5,000 Hz
STANDARD OPERATING VOLTAGE	1.5 Volt
CURRENT CONSUMPTION	Maximum 500µA

PART NUMBER TABLE		
SENSITIVITY (0dB=1V/pa, 1kHz)	(Vs=1.5V, RL=680Ω)	
	SM6050Nx	SM9752Nx
-47 ±4dB	SM6050N474	SM9752N474
-51 ±4dB	SM6050N514	SM9752N514

