



See page 2 for more products and specifications

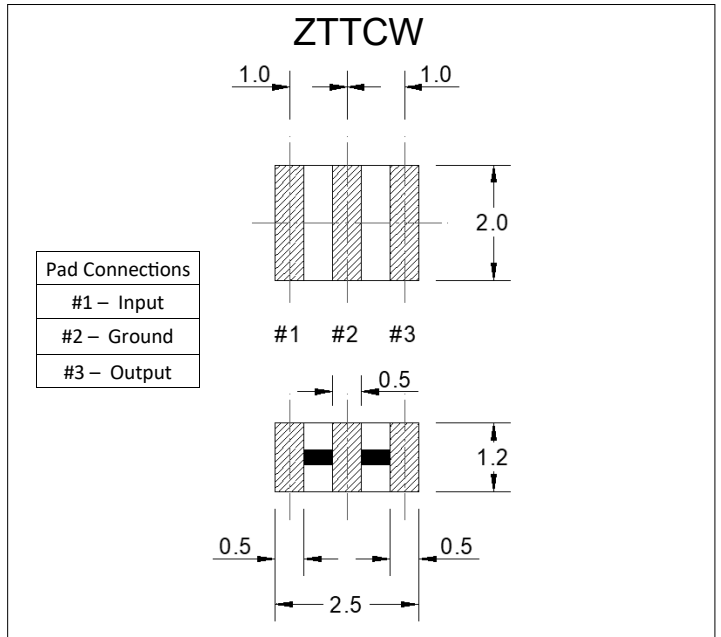

Part Number (inc. frequency)	Frequency Range (MHz)	Frequency Accuracy @ 25°C	Temperature Stability	Operating Temperature Range	Aging After 10 years
ZTTCC _ . _ _ MG	2.0 ~ 8.0	±0.5%	±0.3% Maximum	-20°C ~ +80°C	±0.3%
ZTTCP _ . . _ _ MG	2.0 ~ 12.0				
ZTTCR _ . . _ _ MG	4.0 ~ 8.0				
ZTTCS/CV _ . . _ _ MT	6.0 ~ 13.00				
ZTTCE _ . . _ _ MG	8.0 ~ 12.0				
ZTTCS/CV _ . . _ _ MX	13.01 ~ 50.00				
ZTTCW _ . . _ _ MX	20.0 ~ 60.00				

Rated Voltage (5 sec max)	Insulation Resistance (DC 10V)
DC 100V	5 MΩ

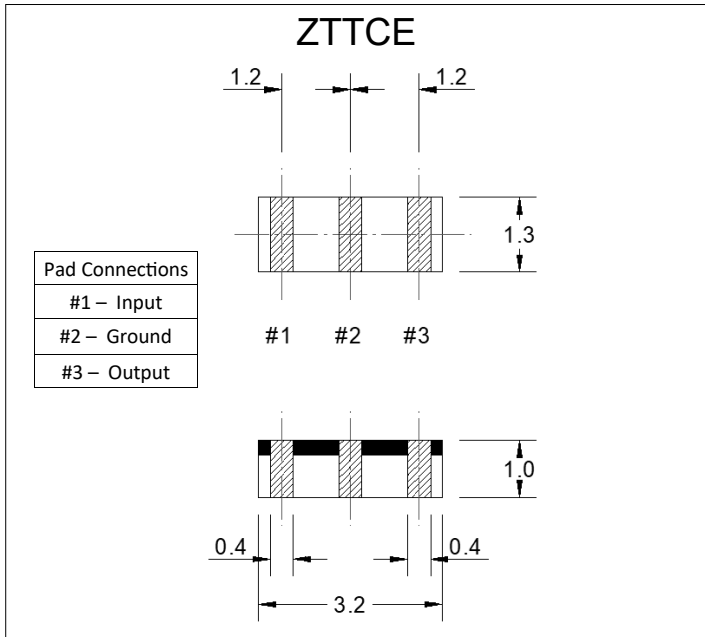

Note: The above specifications are typical only. Please contact our Sales Department for specific requirements.