QSMC-3100

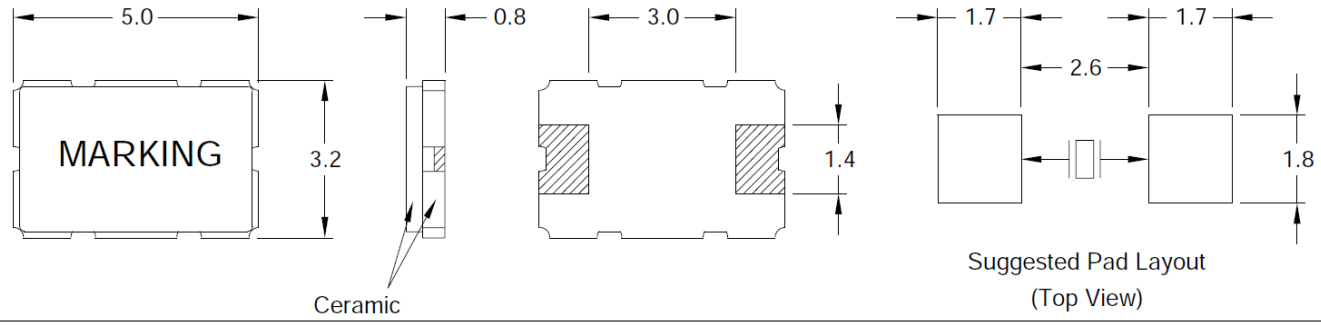

QSMC-3120

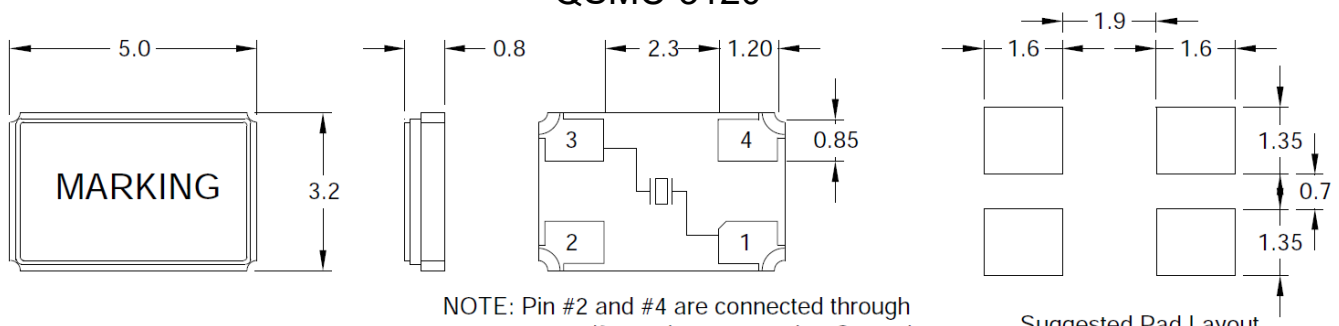

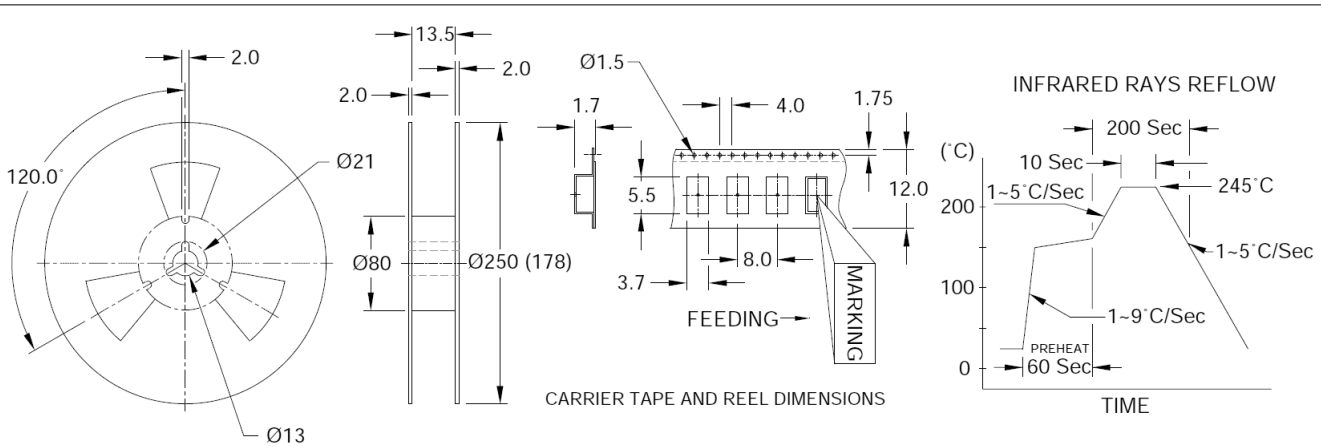

SPECIFICATIONS

Package	Frequency Range (MHz)	Frequency Tolerance @ 25°C	Frequency Stability (Ref. to 25°C)	Operating Temperature Range
QSMC-3100	8.000 ~ 150.000	±10ppm ~ ±50ppm	±10ppm ~ ±100ppm	-20°C ~ +70°C
QSMC-3120				

Frequency Ranges (MHz)	Oscillator Mode	C_L (pF)	Equivalent Series Resistance (ESR)	Drive Level
8.000 ~ 67.000	Fundamental	16, 20, 30	40Ω ~ 150Ω	0.1mW
60.000 ~ 150.000	3rd		80Ω	

Note: The above specifications are typical only. Please contact our Sales Department for specific requirements.

Hy-Q International (Australia) Pty. Ltd. Telephone: +61 (03) 9562-8222 Email: sales@hy-q.com.au Website: www.hy-q.com.au